



OFFICE MODULES & SUSPENDED
LUMINAIRES

advanced systems



VERONA
TECHNICAL SPECIFICATION DATA

Strategic Lighting Group | Strategic Lighting (Europe) Limited | Narrow Lane End Works, 64 Worple Road, Epsom, Surrey KT18 7AG | England UK
Tel. +44 (0)845 241 4631 | Fax. +44 (0)845 241 4632 | Email. info@strategiclighting.com | www.strategiclighting.com



VERONA

fluorescent -dimmable

IP20



38



Energy Saving Technology



Green Energy Technology



Lamp Type Technology



Wattage - Unit max. 3 x 54W dimmable



Voltage ac - alternating current only



Integral HF Ballast



Lumens / Watt value - based on 54W at 1750lms



CRI - Group Index value - 80 - 90%



IP Rating Standard Interior Only



Insulation Class - Functional Earth Required



Product Weight Kilograms/unit



ENEC compliance



CE mark



F - mark fire safe rating



Environmental Technology

Product Purpose & Meaning

- A suspended unit able to be offered in continuous rows on request.
- Verona [Vir-rone-a] takes its name from the place name and Town of elegance.. With a V-profile which is able to optimise direct angles of light softly diffuse when used with perforation 'wings'.

Product Summary

- Direct/indirect office pendant module with outstanding techno-prismatic diffuser (using Fluxidrive™ technology).
- Optical controller also available in louvre version.
- Optional use of perforated side panels on body length.
- Improved glare control and high output lighting.
- Dimmable option.

Applications

- Main or ancillary offices, meeting rooms and cellular office desking.
- Schools, libraries, conference suites.
- Ideal for showrooms and retail.

Performance

Lamp Type 28W / 54W 1200mmT5 G5
 Lamp Qty 3
 Lamp Source Philips, Osram or GE.
 Lumen Output refer to manufacturers data
 Lamp CRI > 90
 Life typically 20,000hrs
 Optic Beams 90° [half peak]

Electrical Data

Voltage 230Vac mains
 Load Watts Variable
 Cable Terminal Yes
 Gear Integrated
 Configuration Mains Power
 Dimming Yes
 Data Protocol(s) DALI, DSI digital or 0-10V analogue

Description

An office pendant luminaire for performance direct/indirect lighting of working spaces, meeting rooms and office related spaces. Direct component with advanced techno-prismatic fluxidrive™ light controller at competitive market pricing. Fluxidrive™ prismatic technology offers smooth light anti-glare control with volumised light appearance and high output ratios. Alternative light controller also available in cross-blade cell louvre. As standard with solid body but optional side perforated body panelling for added lumen output. Suitable for fine-wire suspension. Versions for direct lighting only and surface mounting available on request.

Construction & Finishes

Pressed formed steel & aluminium housing and bezel. Standard finish in painted white Custom RAL options. Acrylic microprismatic [optional PC Tpa>850°C]

Main Features

- Direct / indirect glare control
- Fluxidrive™ techno-prismatic [option in PC to Tpa >850°C.]
- Perforated side panel options
- Fluxidrive™ superior optical controller

Mounting


- Fine-wire suspension kit to 2.0 metres.
- Integral gear.
- 3 Core Connectors
- Live [Red] & Neutral [Black] power feeds - with functional Earth.

Connection Diagram A

- Connection is for standard mains 230V.
- See Connection Diagram A - Page 324.

VERONA

fluorescent -dimmable

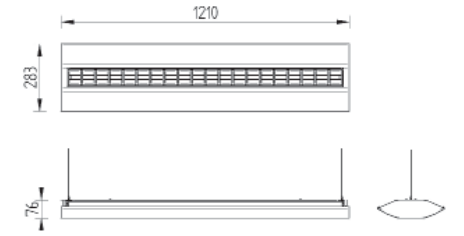

39

Product Order Codes

Techno-Prismatic Controller [microprismatic]



Solid Body

Suspended module with solid side panel body and central techno-prismatic fluxidrive™ diffuser [micro-prismatic].


VER.S328.TP	1210 x 283 pendant	3 x 28W T5 G5	3 x @ 2600lms	Techno-Prismatic
VER.S354.TP	1210 x 283 pendant	3 x 54W T5 G5	3 x @ 4450lms	Techno-Prismatic



Perforated Body

Suspended module with perforated side panel body and central techno-prismatic fluxidrive™ diffuser [micro-prismatic].

VER.P328.TP	1210 x 283 pendant	3 x 28W T5 G5	3 x @ 2600lms	Techno-Prismatic
VER.P354.TP	1210 x 283 pendant	3 x 54W T5 G5	3 x @ 4450lms	Techno-Prismatic



Louvre Blade Controller



Solid Body

Suspended module with solid side panel body and cross-blade louvre.

VER.S328.LO	1210 x 283 pendant	3 x 28W T5 G5	3 x @ 2600lms	Louvre
VER.S354.LO	1210 x 283 pendant	3 x 54W T5 G5	3 x @ 4450lms	Louvre



Perforated Body

Suspended module with perforated side panels and cross-blade louvre.

VER.P328.LO	1210 x 283 pendant	3 x 28W T5 G5	3 x @ 2600lms	Lou- vre
VER.P354.LO	1210 x 283 pendant	3 x 54W T5 G5	3 x @ 4450lms	Louvre

POST-FIX CODES

For codes with
 DIMMING - HF gear defaults for HFR dimming by DALI ,DSI or 1-10V please add post-fix "-DALI", "-DSI" or "-1-10V" respectively. For more cost effective Compensated gear add post fix - "COMP".
 EMERGENCY - 1 Hour or 3 Hour maintained please add post -"EM1" or "-EM3" respectively
 TPa>850°C Prismatic - For use of high thermal prismatic please add post-fix "-TPA".
 SURFACE VERSION - For version surface mounted add post-fix "-SURF".
important note: beam angles and lumen outputs are approximate and guide only please refer to full photometric data, lamp manufacturers data our consult or technical department.

OFFICE MODULES SUSPENDED & SYSTEMS

product pages start page 27

office - retail - leisure

OFFICE MODULES SUSPENDED & SYSTEMS

office - retail - leisure

product pages start page 27

















6

7

RECESSED MODULES

	T5 - 2x54W Page 28 1200x300 	T5 - 2x24W Page 28 600x600 	T5 - 2x24W Page 28 600x600 
	techno-micro-prismatics	OFFICIO series	OFFICIO series
Page 30 	LED - 65W Page 34 600x600 	T5 - 2x24W Page 32 600x600 	T5 - 2x24W Page 32 600x600 
RETAIL STORE	PERSCARA RX	GIOTTO XS series	GIOTTO XS series

SUSPENDED SYSTEM

SYSTEM Page 57 	SYSTEM Page 57/61 	SYSTEM Page 61 	SYSTEM Page 65 	SYSTEM Page 67 
XICATA 48 series - T5	XICATA 48 - T5 & SPOTS	XICATA 48 series - SPOTS	XICATA 48 - SINGLE T5	XICATA 48 - ROTATOR 1
SYSTEM Page 71 	SYSTEM Page 69 	SYSTEM Page 69 	SYSTEM Page 69 	SYSTEM Page 67 
XICATA 48 - WALL UNITS	XICATA 48 - VIENNA	XICATA 48 - TUBE	XICATA 48 - LED SPOTS	XICATA 48 - ROTATOR 2
Page 60 	Page 64 	Page 66 	Page 68 	
HAIR SALONS	LIBRARY'S	CAR DEALERSHIPS	RETAIL	
Page 63 	Page 58 			
SCHOOLS	RECEPTIONS			

SUSPENDED LUMINAIRES

Page 36 30x3W - LED 	Page 38 3x54W - T5 	Page 40 3x80W - T5 	Page 42 LED - 32x3W 	Page 44 LED - 32x3W 
MONZA	VERONA	AILERON	CHIARO	LATLUCE
Page 46 2x54W - T5 	Page 46 2x54W - T5 	Page 48 2x24W - T5 	Page 35 LED - 72W 	Page 103 LED - 20W/m 
MILANO series	MILANO series	VIENNA	PERSCARA XS	AMBIENTALE
Page 26 	Page 46 	Page 39 		
OFFICE'S	OFFICE'S	OFFICE'S		

SURFACE

Page 48 2x80W - T5 	Page 48 
VIENNA	OFFICE'S

RECESSED SYSTEM

Page 50 SYSTEM 	Page 51 SYSTEM 	Page 54 
XICATA 77 RECESSED	XICATA 77 RECESSED	OFFICE'S

OFFICE WALL LUMINAIRES

Page 228 2x55W TC-1 	Page 229 1x55W TC-1 	
ASYAERO	KEELIO	DEALER ROOMS